





# XGTL160A(5020-10)

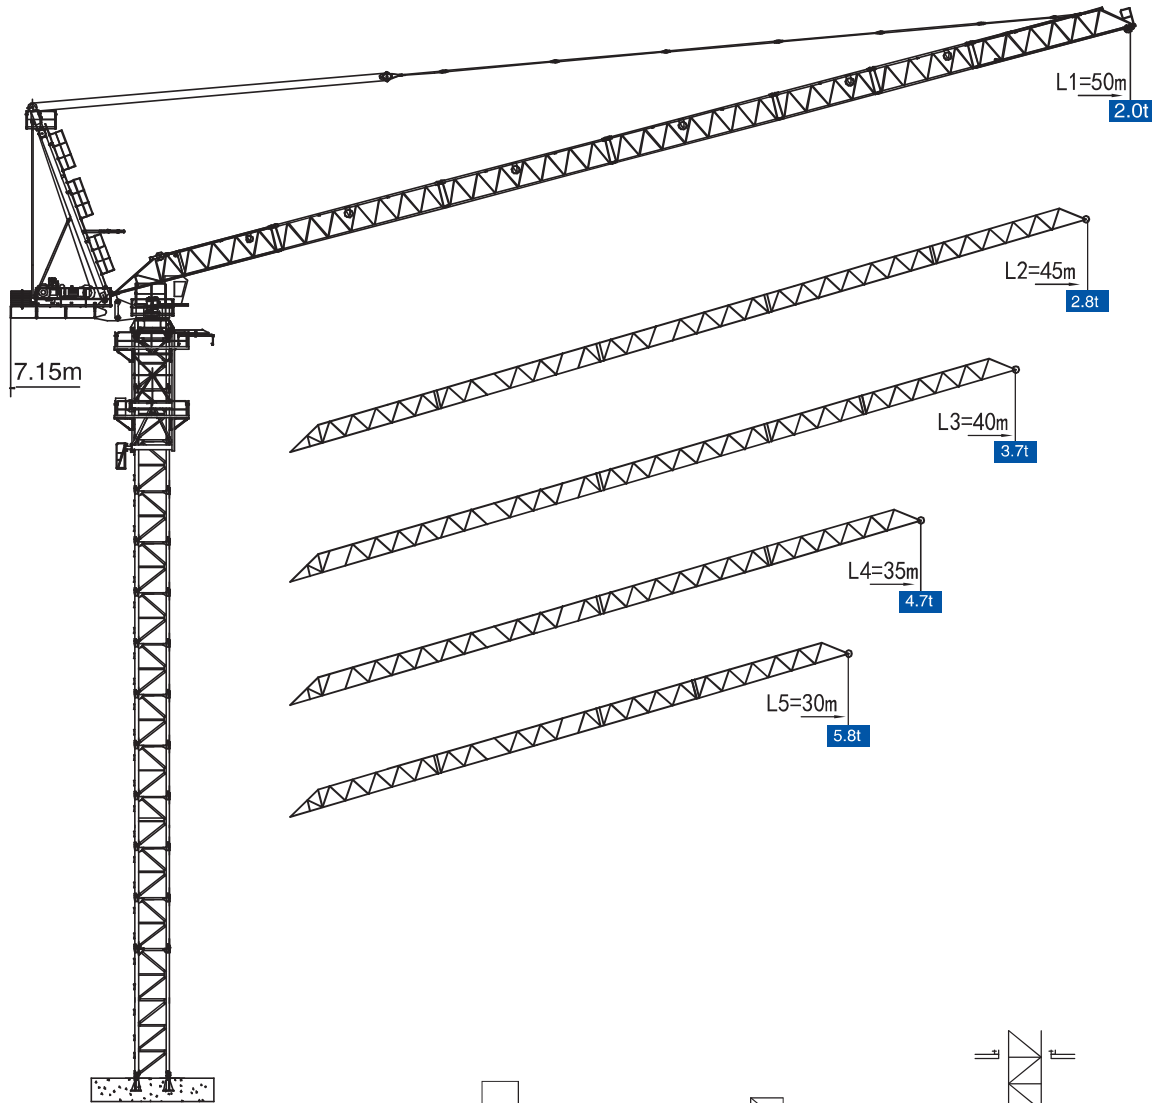


固定式  
Stationary



行走式  
Travelling



门座式  
portal type




内爬式  
Inner-climbing type

★ 可变换的其他安装方式同我们协商。 Mounting possibilities Consult us.

动臂系列 Luffing


# XGTL160A(5020-10)

## 塔身与反力 Masts and Reactions

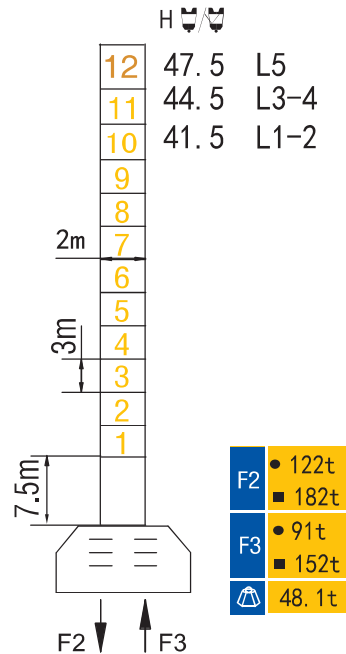

H 臂根铰点高度 Height of hinged point at jib root ● 工作状态 In service ■ 非工作状态 Out of service  
 ⚠ 最大臂长最大独立高度时的整机自重（不含配重、压重、吊重）  
 Weight with max free-standing height and max jib (without counter-weight and load)



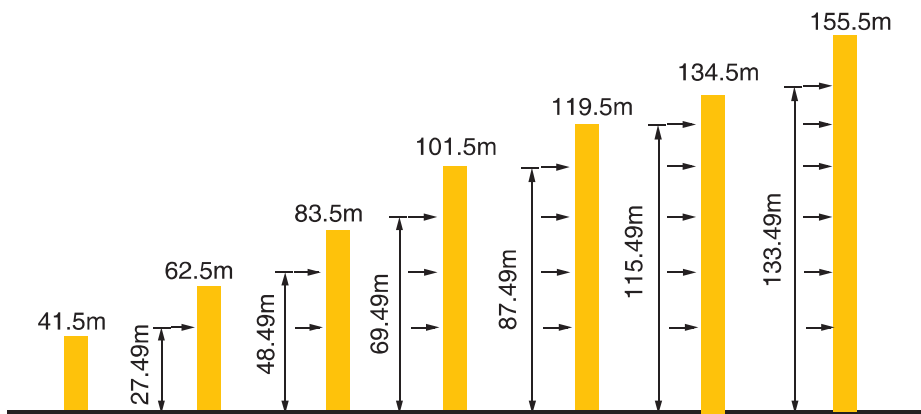







## 附着 Anchorages



★ 如需达到更高的高度，请与我们联系。For greater heights, consult us.





# XGTL160A(5020-10)

## 起重特性 Load Diagrams

起重臂长 Jib length		$R_{min}$	$R(C_{max})$	$C_{max}$	15	20	25	30	35	40	45	50
50m		3.94	31.38	5000	5000				4183	3285	2577	2000
		3.94	18.73	10000	10000	9214	6846	5230	4057	3169	2474	1920
起重臂长 Jib length		$R_{min}$	$R(C_{max})$	$C_{max}$	15	20	25	30	35	40	45	
45m		3.42	32.54	5000	5000				4451	3534	2800	
		3.42	19.25	10000	10000	9580	7177	5534	4340	3433	2721	
起重臂长 Jib length		$R_{min}$	$R(C_{max})$	$C_{max}$	15	20	25	30	35	40		
40m		2.90	33.34	5000	5000				4635	3700		
		2.90	19.60	10000	10000	9780	7380	5735	4538	3622		
起重臂长 Jib length		$R_{min}$	$R(C_{max})$	$C_{max}$	15	20	25	30	35			
35m		2.38	33.63	5000	5000				4700			
		2.38	19.60	10000	10000	9809	7442	5817	4623			
起重臂长 Jib length		$R_{min}$	$R(C_{max})$	$C_{max}$	15	20	25	30				
30m		1.86	30.68	5000	5000							
		1.86	19.60	10000	10000	9771	7440	5800				

★ 其他起重性能需求，请与我们联系。Any other lifting capacity, consult us.

## 配重配置 Counter Weights

Counter-jib ballast		 2900 (kg)	 7600 (kg)	
		PZ2900	PZ7600	 (kg)
50m	7.15m	1	1	10500
45m	7.15m	1	1	10500
40m	7.15m	1	1	10500
35m	7.15m	1	1	10500
30m	7.15m	1	1	10500

# XGTL160A(5020-10)

## 传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 Rope Capacity	功率 (kW) Power	
起升 Hoisting		45JLF25X		0~45	5	575m >575m*	45
				0~67	3.5		
				0~90	1.7		
				0~22.5	10		
				0~33.5	7		
				0~45	3.5		
变幅 Luffing		37JDF40CX	2.5min			37	
回转 Slewing		JH13E	0.6r/min			2×5.5	
行走 Travelling		RT	0~24 m/min			2×5.2	
电源 Main Supply					~380 (±10%) 50Hz		
总功率 (不含顶升和行走) Gross Power (Excuding climbing and travelling)					93kW		

★ 请与我们联系。Consult us, Please.

本样册技术参数不受法律约束，具体以相应产品说明书为准。

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.