




XGTL750 XGTL750II

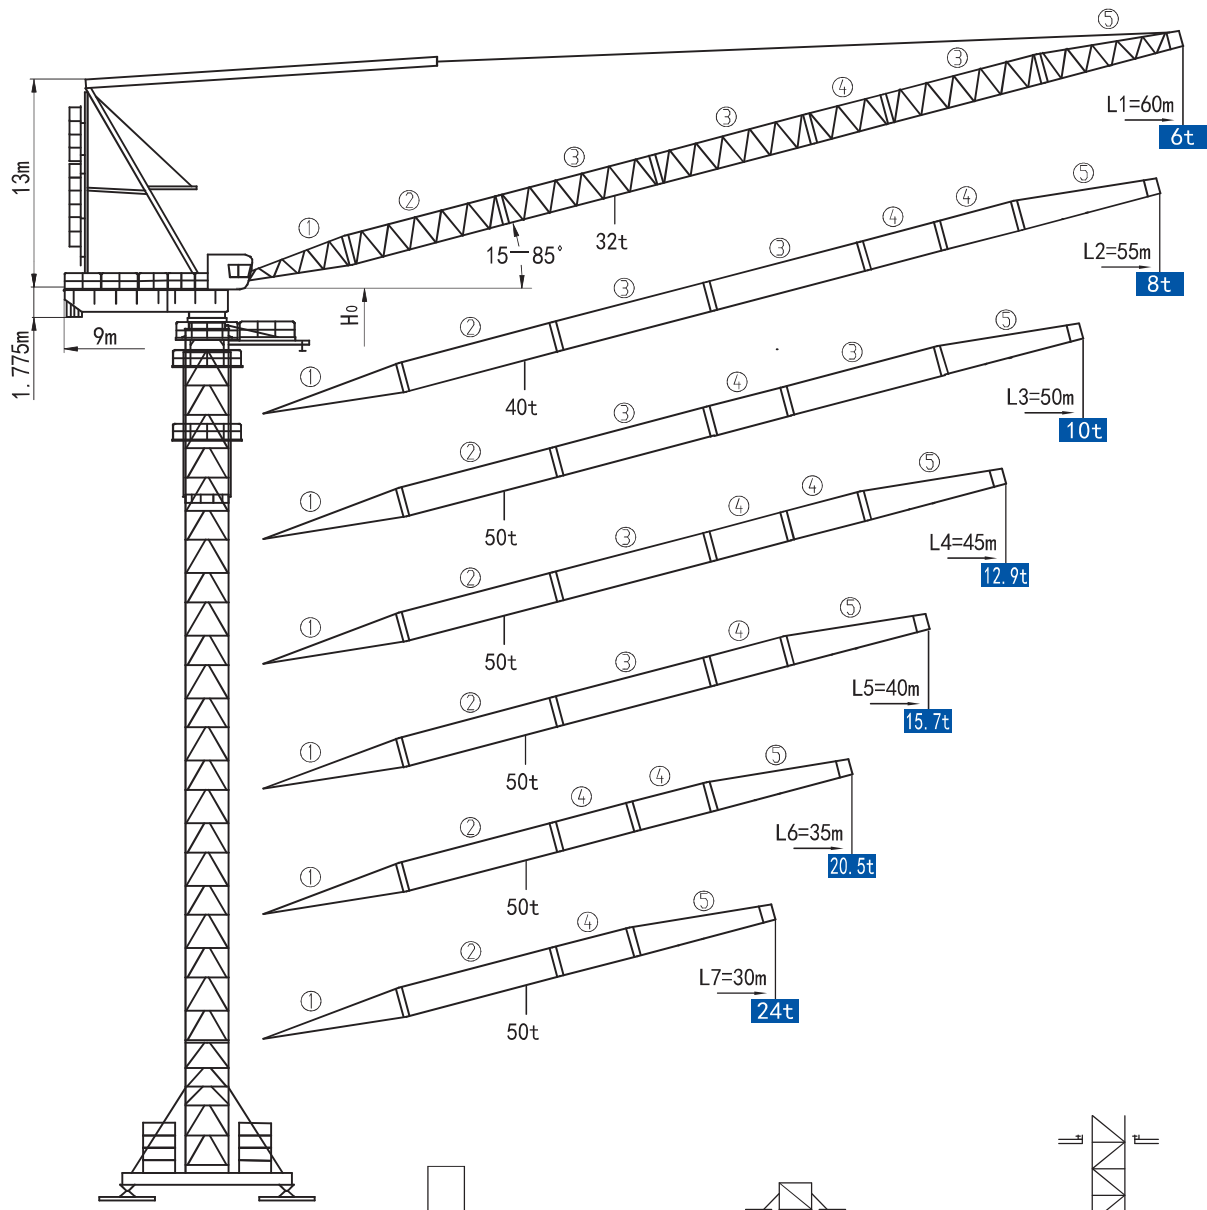


★ 可变换的其他安装方式同我们协商。 Mounting possibilities Consult us.

动臂系列 Luffing

XGTL750 XGTL750II

塔身与反力 Masts and Reactions

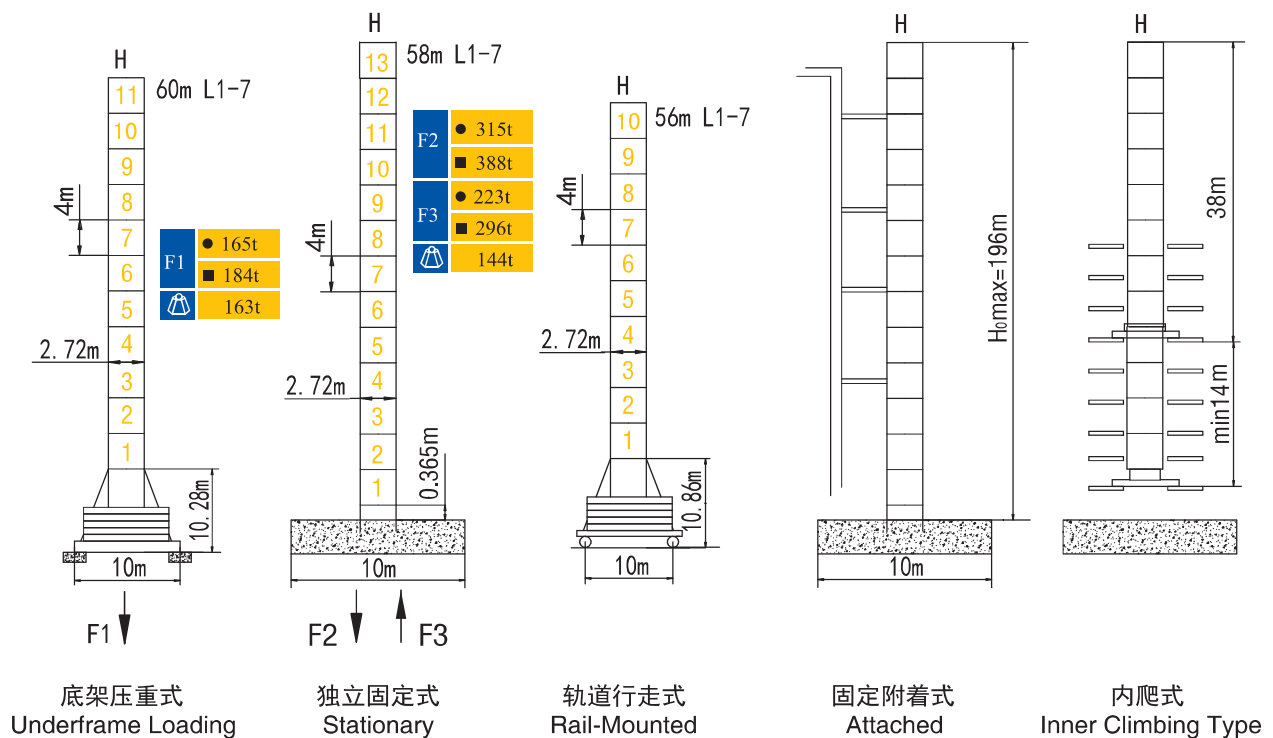

H 臂根铰点高度 Height of hinged point at jib root

● 工作状态 In service








■ 非工作状态 Out of service

⚙️ 最大臂长最大独立高度时的整机自重 (不含配重、压重、吊重)

Weight with max free-standing height and max jib (without counter-weight and load)

XGTL750 XGTL750II

起重特性 Load Diagrams

| | | | | | | | | | | | | | | | |
|---------|---|------------------|------------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|
| 起重臂 Jib | R (C _{max}) | C _{max} | 幅度 (m) Radius | 6.60 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | |
| 60m |  | 24.00m | 25t | 起重量 (kg) | 25000 | 25000 | 25000 | 25000 | 20600 | 16800 | 13000 | 10900 | 8700 | 7500 | 6000 |
| | | 16.20m | 32t | Load | 32000 | 32000 | 31000 | 27400 | 20600 | 16800 | 13000 | 10900 | 8700 | 7500 | 6000 |
| 起重臂 Jib | R (C _{max}) | C _{max} | 幅度 (m) Radius | 6.20 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | | |
| 55m |  | 26.00m | 25t | 起重量 (kg) | 25000 | 25000 | 25000 | 25000 | 21200 | 17700 | 13500 | 11400 | 9200 | 8000 | |
| | | 15.00m | 40t | Load | 40000 | 40000 | 34800 | 28300 | 21200 | 17700 | 13500 | 11400 | 9200 | 8000 | |
| 起重臂 Jib | R (C _{max}) | C _{max} | 幅度 (m) Radius | 5.80 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | | | |
| 50m |  | 26.00m | 25t | 起重量 (kg) | 25000 | 25000 | 25000 | 25000 | 22000 | 18500 | 14200 | 12100 | 10000 | | |
| | | 14.70m | 50t | Load | 50000 | 49000 | 36000 | 29100 | 22000 | 18500 | 14200 | 12100 | 10000 | | |
| 起重臂 Jib | R (C _{max}) | C _{max} | 幅度 (m) Radius | 5.30 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | | | | |
| 45m |  | 26.00m | 25t | 起重量 (kg) | 25000 | 25000 | 25000 | 25000 | 22700 | 19200 | 14800 | 12900 | | | |
| | | 14.80m | 50t | Load | 50000 | 49300 | 36200 | 30100 | 22700 | 19200 | 14800 | 12900 | | | |
| 起重臂 Jib | R (C _{max}) | C _{max} | 幅度 (m) Radius | 5.00 | 15 | 20 | 25 | 30 | 35 | 40 | | | | | |
| 40m |  | 28.00m | 25t | 起重量 (kg) | 25000 | 25000 | 25000 | 25000 | 23700 | 19900 | 15700 | | | | |
| | | 15.00m | 50t | Load | 50000 | 50000 | 36500 | 30200 | 23700 | 19900 | 15700 | | | | |
| 起重臂 Jib | R (C _{max}) | C _{max} | 幅度 (m) Radius | 4.50 | 15 | 20 | 25 | 30 | 35 | | | | | | |
| 35m |  | 28.00m | 25t | 起重量 (kg) | 25000 | 25000 | 25000 | 25000 | 23800 | 20500 | | | | | |
| | | 15.00m | 50t | Load | 50000 | 50000 | 36700 | 30300 | 23800 | 20500 | | | | | |
| 起重臂 Jib | R (C _{max}) | C _{max} | 幅度 (m) Radius | 4.00 | 15 | 20 | 25 | 30 | | | | | | | |
| 30m |  | 28.00m | 25t | 起重量 (kg) | 25000 | 25000 | 25000 | 25000 | 24000 | | | | | | |
| | | 15.00m | 50t | Load | 50000 | 50000 | 36900 | 30400 | 24000 | | | | | | |

★ 其他起重性能需求，请与我们联系。Any other lifting capacity, consult us.

XGTL750 XGTL750II

传动机构 Mechanisms

XGTL750 柴油动力全液压驱动 Diesel Power & Hydraulic Drive

| 机构 Mechanisms | 图例 Example | 机构代号 Model | 速度 (m/min) Speed | 起重量 (t) Hoist Weight | 容绳量 Rope Capacity | 功率 (kW) Power | |
|---|---------------|---------------|---------------------|-------------------------|----------------------|------------------|------------------------|
| 起升 Hoisting | | --- | | 0~30 0~60 0~140 | 25 12.5 5 | 550 >550* | (柴油动力 Diesel) 350kW |
| | | | | 0~15 0~30 0~70 | 50 25 10 | | |
| 变幅 Luffing | | --- | ≤ 3.2 min 15°~85° | | | | |
| 回转 Slewing | | --- | 0~0.6 r/min | | | | |
| 行走 Travelling | | RT | 0~25m/min | | | 8×5.2 | |
| 总功率 Gross power (柴油发动机标称额定功率 Nominal Rated Power of Diesel Generator) | | | | | | 350kW | |

XGTL750II 电动力 Electric

| 机构 Mechanisms | 图例 Example | 机构代号 Model | 速度 (m/min) Speed | 起重量 (t) Hoist Weight | 容绳量 Rope Capacity | 功率 (kW) Power | |
|---|---------------|---------------|---------------------|-------------------------|----------------------|--------------------|-----|
| 起升 Hoisting | | 160LVF260B | | 0~32 0~64 0~100 | 25 12.5 6 | 470m >470m* | 160 |
| | | | | 0~16 0~32 0~50 | 50 25 12 | | |
| 变幅 Luffing | | 90DVF148 | ≤ 3.2 min 15°~85° | | | 90 | |
| 回转 Slewing | | 11RVF | 0~0.6 r/min | | | 2×11 | |
| 电源 Main Supply | | | | | | ~380V (±10%) 50Hz* | |
| 总功率 (不含顶升和行走) Gross Power (Excluding climbing and travelling) | | | | | | 272kW | |

★ 请与我们联系。Consult us, Please.

本样册技术参数不受法律约束，具体以相应产品说明书为准。

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.