


# XL6025-20

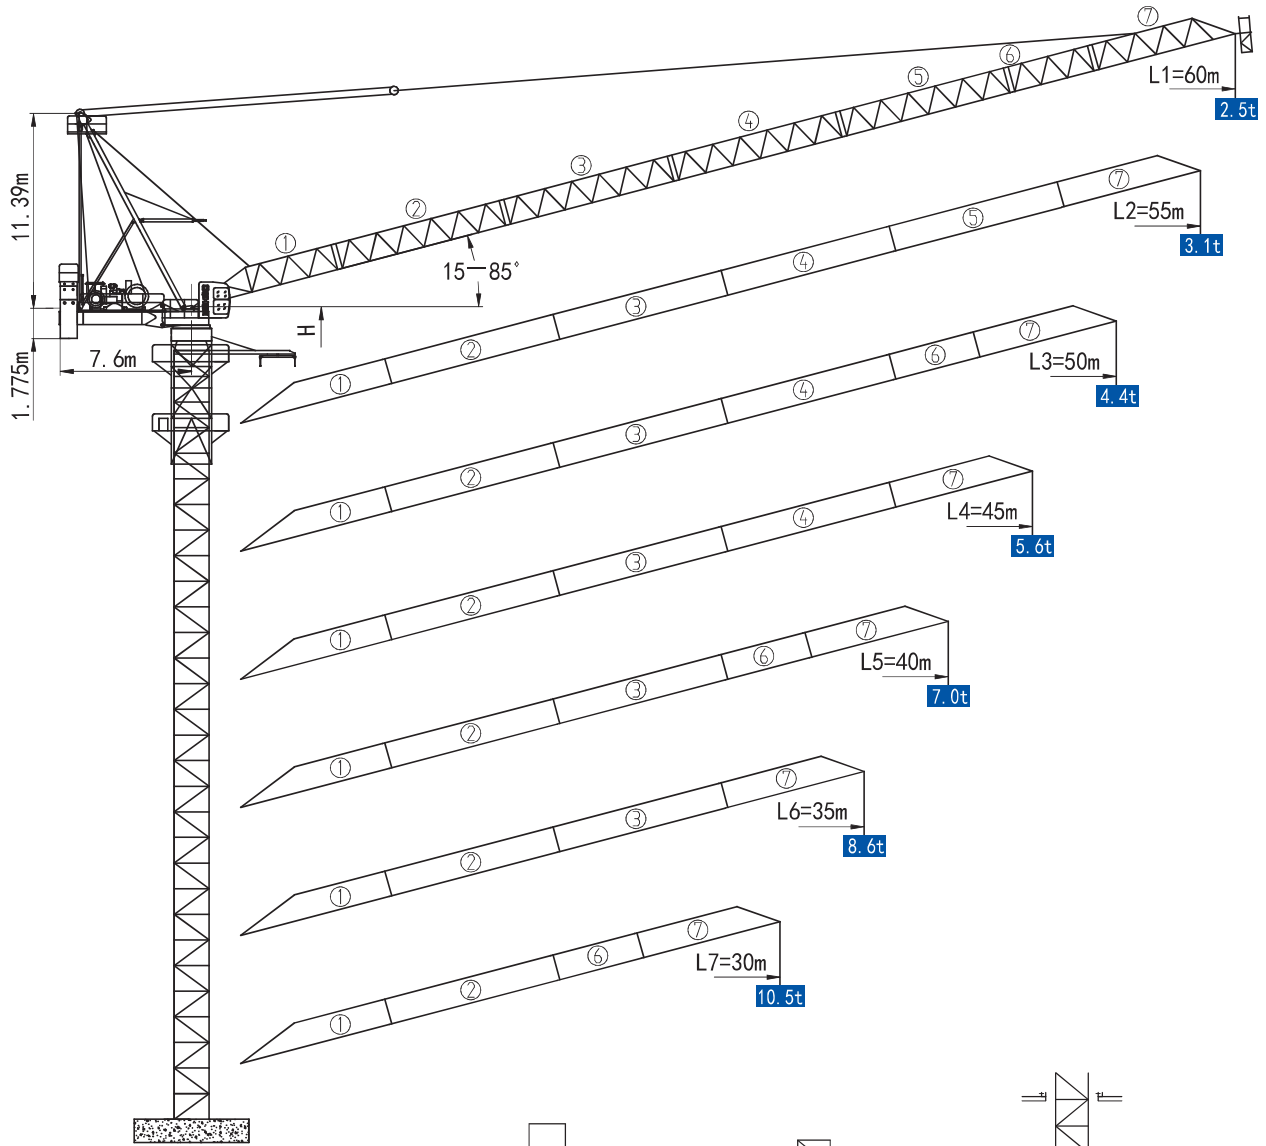

固定式  
Stationary

行走式  
Travelling

门座式  
portal type


内爬式  
Inner-climbing type

★ 可变换的其他安装方式同我们协商。 Mounting possibilities Consult us.

动臂系列 Luffing

# XL6025-20

## 塔身与反力 Masts and Reactions

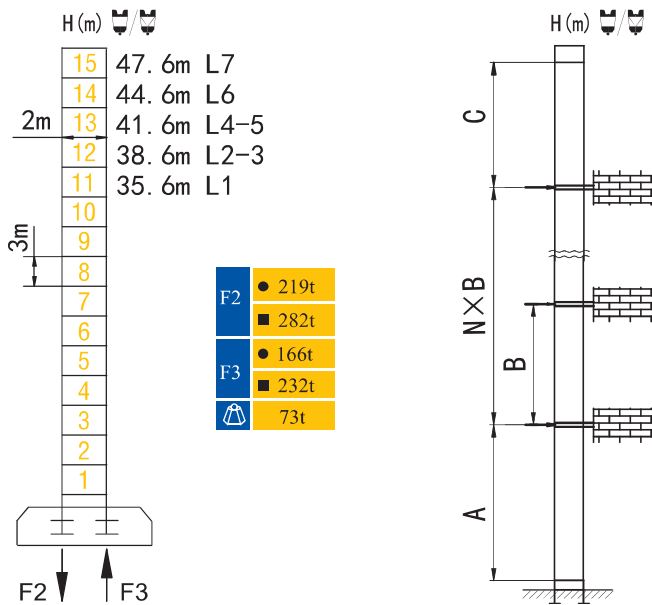

起重臂长 Jib length	A (m)	B (m)	C (m)	H <sub>max</sub> (m)
L7	37.5	27	34.5	266.6
L6	34.5	24	31.5	260.6
L5	31.5	21	28.5	254.6
L4	31.5	21	28.5	251.6
L3	28.5	18	25.5	245.6
L2	28.5	18	25.5	239.6
L1	25.5	15	22.5	236.6

N 附着道数 Number of tie collars

$$H = A + N \times B + C + 2.6$$

塔身节数量 Number of masts =  $(H - 2.6) / 3$

H 臂根铰点高度 Height of hinged point at jib root

● 工作状态 In service



















■ 非工作状态 Out of service

△ 最大臂长最大独立高度时的整机自重 (不含配重、压重、吊重)

Weight with max free-standing height and max jib (without counter-weight and load)

# XL6025-20















## 起重特性 Load Diagrams

起重臂 Jib	R(C <sub>max</sub> )	C <sub>max</sub>	幅度 (m) Range	5.51	15	20	25	30	35	40	45	50	55	60	
60m	 32.24m	8t	起重量 (kg) Load	8000						7058	5679	4609	3760	3071	2500
起重臂 Jib	R(C <sub>max</sub> )	C <sub>max</sub>	幅度 (m) Range	5.08	15	20	25	30	35	40	45	50	55		
55m	 26.88m	10t	起重量 (kg) Load	10000				8594	6843	5535	4527	3734	3100		
	 21.25m	13.5t		13500		10936	8494	6743	5435	4427	3634	3000			
起重臂 Jib	R(C <sub>max</sub> )	C <sub>max</sub>	幅度 (m) Range	4.64	15	20	25	30	35	40	45	50			
50m	 28.63m	10t	起重量 (kg) Load	10000				9396	7582	6232	5200	4400			
	 20.66m	15t		15000		11836	9296	7482	6132	5100	4300				
	 16.12m	20t		20000		15510	11736	9196	7382	6032	5000	4200			
起重臂 Jib	R(C <sub>max</sub> )	C <sub>max</sub>	幅度 (m) Range	4.20	15	20	25	30	35	40	45				
45m	 29.64m	10t	起重量 (kg) Load	10000				9850	8008	6641	5600				
	 21.32m	15t		15000		12333	9750	7908	6541	5500					
	 16.56m	20t		20000		16080	12233	9650	7808	6441	5400				
起重臂 Jib	R(C <sub>max</sub> )	C <sub>max</sub>	幅度 (m) Range	3.77	15	20	25	30	35	40					
40m	 30.15m	10t	起重量 (kg) Load	10000					8370	7000					
	 21.73m	15t		15000		12721	10120	8270	6900						
	 16.92m	20t		20000		16502	12621	10020	8170	6800					
起重臂 Jib	R(C <sub>max</sub> )	C <sub>max</sub>	幅度 (m) Range	3.33	15	20	25	30	35						
35m	 31.02m	10t	起重量 (kg) Load	10000					8600						
	 22.02m	15t		15000		12916	10335	8500							
	 17.04m	20t		20000		16679	12816	10235	8400						
起重臂 Jib	R(C <sub>max</sub> )	C <sub>max</sub>	幅度 (m) Range	2.90	15	20	25	30							
30m	 31.00m	10t	起重量 (kg) Load	10000											
	 22.18m	15t		15000		13055	10500								
	 17.10m	20t		20000		16780	12955	10400							

★ 其他起重性能需求，请与我们联系！ Any other lifting capacity, consult us!

# XL6025-20

## 传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 Rope Capacity	功率 (kW) Power
起升 Hoisting		90JLF50Z	 0~45	10	804m >804m <sup>*</sup>	90
			 0~64	5		
			 0~90	2.5		
起升 Hoisting		90JLF50Z	 0~30	15	804m >804m <sup>*</sup>	90
			 0~43	7.5		
			 0~60	3.8		
起升 Hoisting		90JLF50Z	 0~22.5	20	804m >804m <sup>*</sup>	90
			 0~32	10		
			 0~45	5		
变幅 Luffing		45JDF40BX	≤ 3 min			45
回转 Slewing		JH12GT6	0~0.7 r/min			2×9
行走 Travelling		RT	0-25m/min			4×4
电源 Main Supply				~380V (±10%) 50Hz		
总功率 (不含顶升和行走) Gross Power (Excuding climbing and travelling)				153kW		

★ 请与我们联系 Consult us, Please!

本样册技术参数不受法律约束, 具体以相应产品说明书为准

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.