


XGT63YD(5013-5)

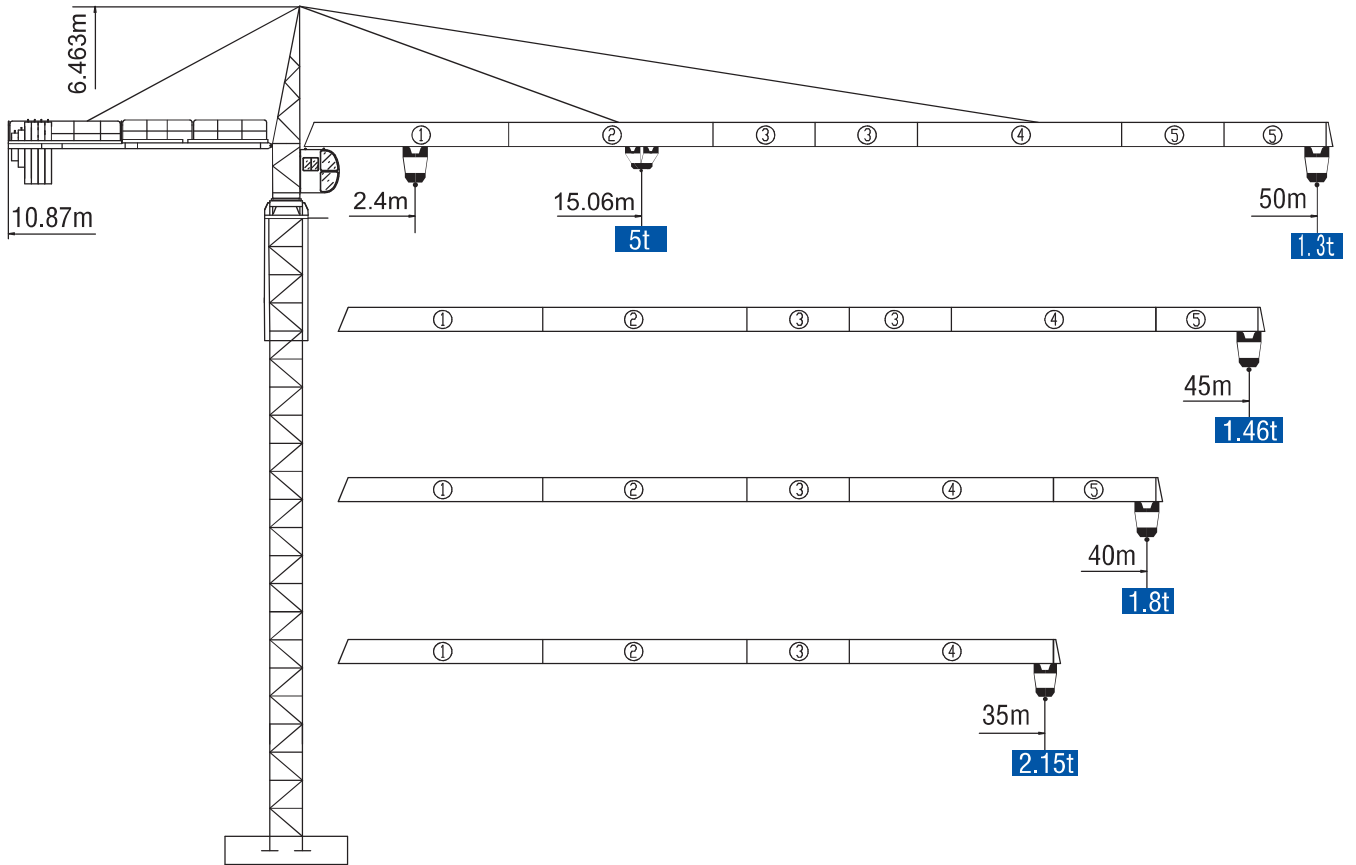

固定式
Stationary

底架压重式
Under frame loading

底架行走式
Travelling


内爬式
Inner-climbing type

★ 可变换的其他安装方式同我们协商。 Mounting possibilities Consult us.


塔顶系列 Topkit

XGT63YD(5013-5)


塔身与反力 Masts and Reactions

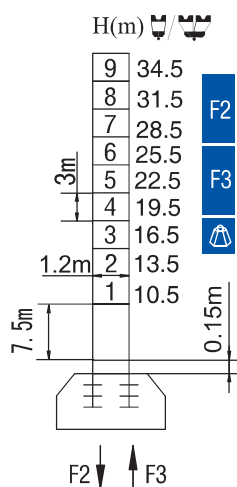

固定式
Stationary

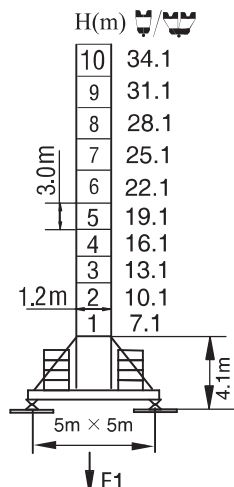


底架压重式
Under frame loading

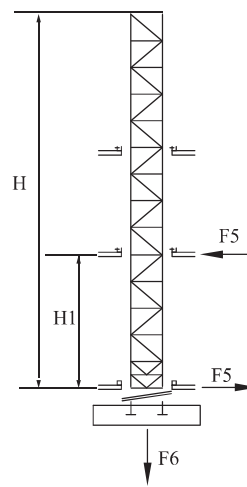

内爬式
Inner-climbing type

内爬框外廓尺寸

Overall dimensions of inner-climbing frame




H1(m)	13m
H(m)	29.2m
L(m)	1.5m
B(m)	1.38m

F5	6t
F6	37.9t

H 吊钩高度 Height of the hook ● 工作状态 In service ■ 非工作状态 Out of service
 ⚠ 不含平衡重最大臂长最大工作高度时的自重 Without load and ballast with longest jib and maximum height

附着 Anchorages

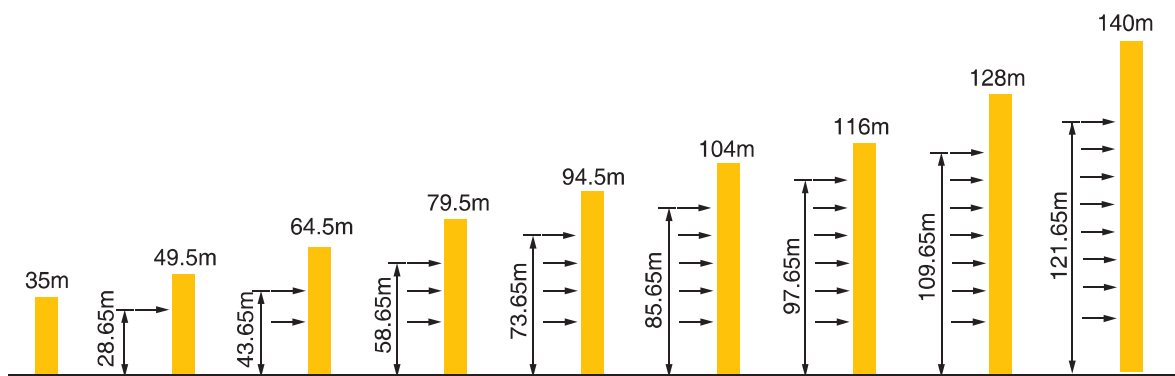

★ 如需达到更高的高度，请与我们联系！For greater heights, consult us!




XGT63YD(5013-5)

起重特性 Load Diagrams

起重臂 (m) Jib	R _{min}	R(C _{max})	C _{max}	幅度 (m) Range										
				2	10	15	20	25	30	35	40	45	50	
50m		2.4	29.3	2.5t	2500					2397	2003	1709	1481	1300
		2.4	15.06	5.0t	5000			3512	2668	2111	1717	1424	1196	1015
45m		2.4	28.97	2.5t	2500					2364	1975	1685	1460	
		2.4	14.89	5.0t	5000			3463	2629	2079	1690	1399	1175	
40m		2.4	30.6	2.5t	2500					2107	1800			
		2.4	15.7	5.0t	5000			3697	2815	2234	1822	1515		
35m		2.4	31.14	2.5t	2500					2150				
		2.4	15.97	5.0t	5000			3774	2876	2284	1865			

★ 其他起重性能需求，请与我们联系 Anyother lifting capacity, consult us.

配重配置 Counter Weights

Counter-jib ballast		2120 (kg) / 1340 (kg) / 1200 (kg)			
		 (kg)	PZ2120	PZ1340	PZ1200
50m	10.87m	11800	5	0	1
45m	10.87m	11020	4	1	1
40m	10.87m	9680	4	0	1
35m	10.87m	8480	4	0	0

XGT63YD(5013-5)

传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 Rope Capacity	功率 (kW) Power	
起升 Hoisting		18QT13TH		9	2.5	345m >345m [★]	18/18/5
				35	2.5		
				70	1.25		
				4.5	5		
				17.5	5		
				35.5	2.5		
变幅 Trolleying		24BDZ50II	40/20 m/min		2.4/1.5		
回转 Slewing		55HR120	0-0.6r/min		5.5		
行走 Travelling		RT	0~24 m/min		2×5.2		
电源 Main Supply					~ 415V(±10%) 50Hz		
总功率 (不含顶升和行走) Gross Power (Excuding climbing and travelling)					25.9kW		

★ 请与我们联系 Consult us, Please.

此样本所列技术参数不受法律约束, 具体请详见相应产品说明书

These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.