





XGTL120(5016-8)

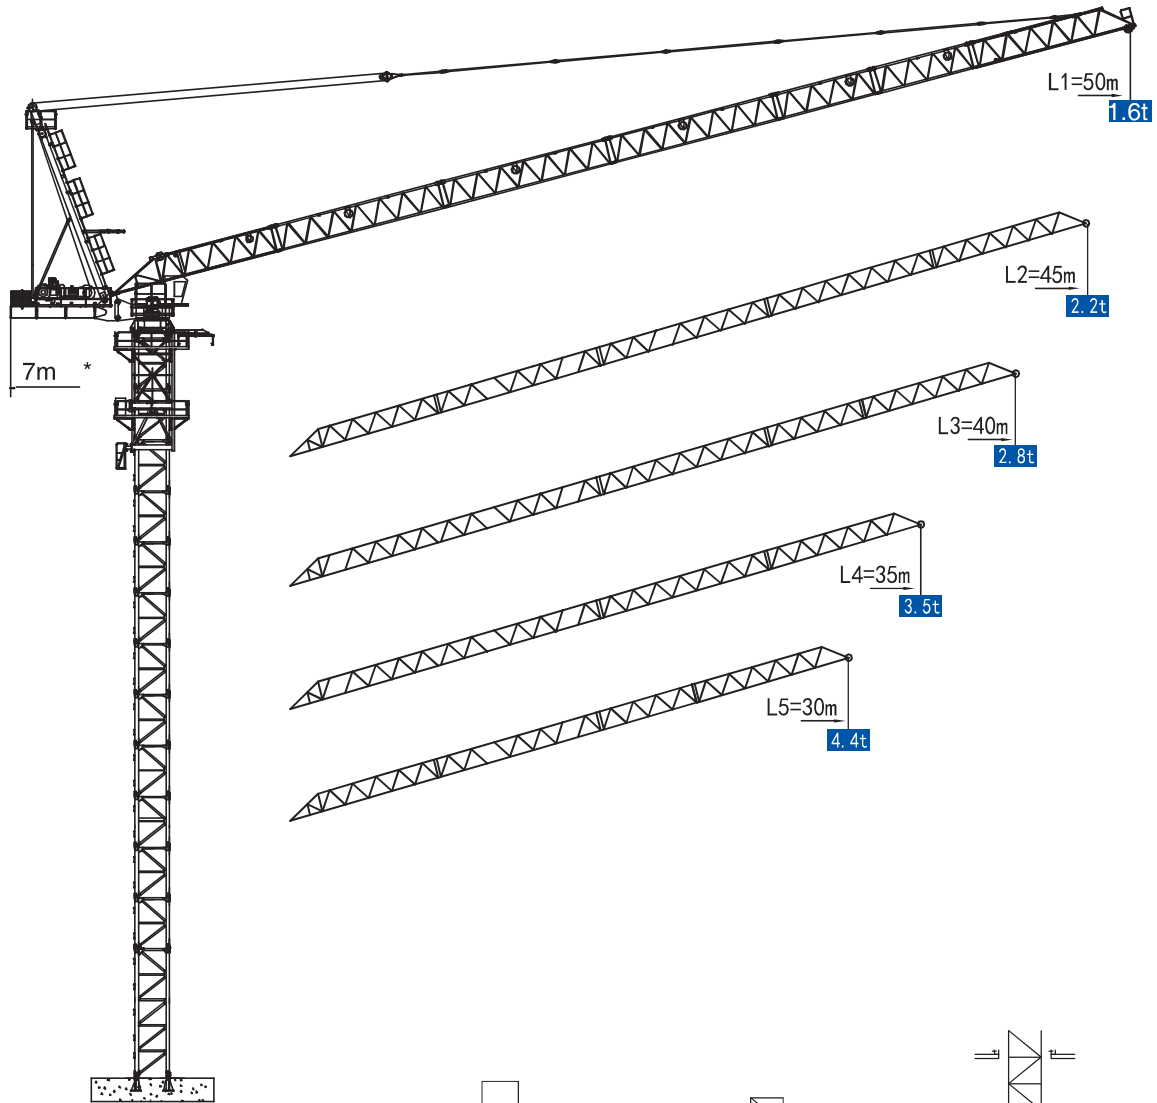


固定式
Stationary



行走式
Travelling



门座式
portal type




内爬式
Inner-climbing type

★ 可变换的其他安装方式同我们协商。 Mounting possibilities Consult us.

动臂系列 Luffing


XGTL120(5016-8)

塔身与反力 Masts and Reactions

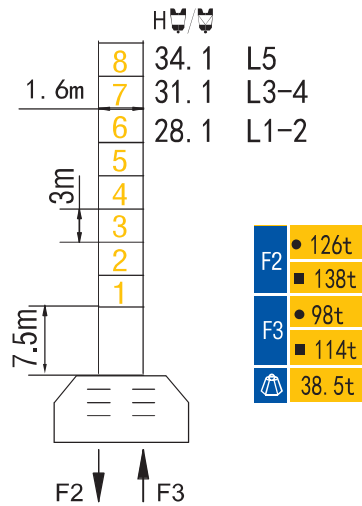

H 臂根铰点高度 Height of hinged point at jib root ● 工作状态 In service ■ 非工作状态 Out of service
 ⚠ 最大臂长最大独立高度时的整机自重 (不含配重、压重、吊重)
 Weight with max free-standing height and max jib (without counter-weight and load)

附着 Anchorages

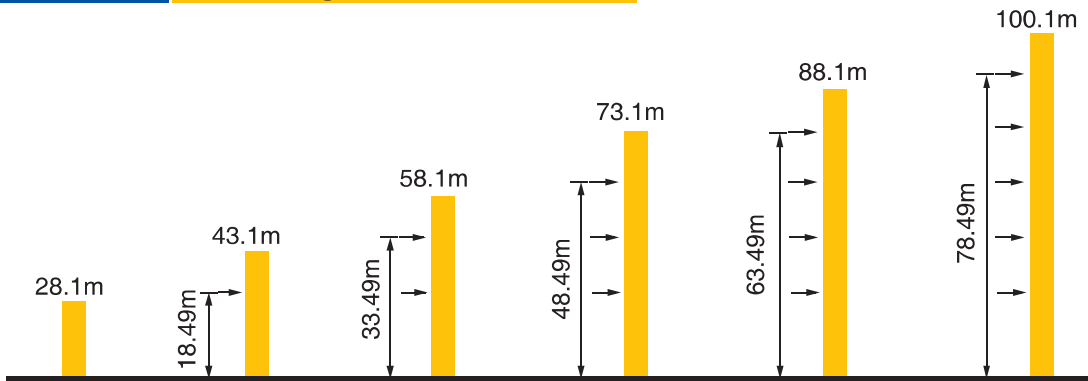

★ 如需达到更高的高度, 请与我们联系。 For greater heights, consult us.

XGTL120(5016-8)

起重特性 Load Diagrams

起重臂长 Jib length	R_{min}	$R(C_{max})$	C_{max}	15	20	25	30	35	40	45	50	
50m		3.94	31.72	4000	4000				3400	2661	2076	1600
		3.94	18.74	8000	8000	7393	5525	4228	3274	2545	1973	1520
起重臂长 Jib length	R_{min}	$R(C_{max})$	C_{max}	15	20	25	30	35	40	45		
45m		3.42	32.45	4000	4000				3541	2795	2200	
		3.42	19.11	8000	8000	7575	5695	4388	3428	2695	2121	
起重臂长 Jib length	R_{min}	$R(C_{max})$	C_{max}	15	20	25	30	35	40			
40m		2.90	32.37	4000	4000				3535	2800		
		2.90	18.92	8000	8000	7490	5652	4374	3437	2722		
起重臂长 Jib length	R_{min}	$R(C_{max})$	C_{max}	15	20	25	30	35				
35m		2.38	32.44	4000	4000				3550			
		2.38	18.82	8000	8000	7452	5646	4394	3474			
起重臂长 Jib length	R_{min}	$R(C_{max})$	C_{max}	15	20	25	30					
30m		1.86	30.00	4000	4000							
		1.86	18.72	8000	8000	7409	5631	4400				

★ 其他起重性能需求，请与我们联系。 Anyother lifting capacity, consult us.

配重配置 Counter Weights

Counter-jib ballast			6200 (kg)		2300 (kg)	
		PZ 6200		PZ 2300		(kg)
50m	7m	1		1		8500
45m	7m	1		1		8500
40m	7m	1		1		8500
35m	7m	1		1		8500
30m	7m	1		1		8500

XGTL120(5016-8)

传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 Rope Capacity	功率 (kW) Power	
起升 Hoisting		30JLF20A		0~40	4	550m >550m*	30
				0~60	3		
				0~80	1.5		
				0~20	8		
				0~30	6		
				0~40	3		
变幅 Luffing		30JDF35B	≤3min			30	
回转 Slewing		JH08T6	0~0.7r/min			2×5.5	
行走 Travelling		RT	0~24m/min			2×5.2	
电源 Main Supply					~380(±10%) 50Hz		
总功率 (不含顶升和行走) Gross Power (Excuding climbing and travelling)					71kW		

★ 请与我们联系。Consult us, Please.

本样册技术参数不受法律约束，具体以相应产品说明书为准。

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.